

Cleats & Cable Fixings



Description

- > Suitable for cables in Trefoil Groups - cable diameter 62-186mm.
- > For use on MV & HV cable designs.
- > Can be supplied with Zac rubber liner for use with HV designs.
- > Deep section cast bases aid cable installation.
- > 6 sizes in range
- > Single bolt central fixing.
- > Clamping bolt can be used for Pilot Cables.


- > **Tested in accordance with EN 50368:2003.**
- > Cleat Type (6.1,6.1.3) - metallic.
- > Impact resistant (6.2,6.2.5,9.3) - V.Heavy >6.7kg at 300mm.
- > Operating temperature (6.4) -60°C +85°C.

376 TR Range of Trefoil Cleats



Cleat Details

Cable Dimensions	Design ref number Number	Extrusion Length A (mm)	Width O/A D (mm)	Bolt CRS C (mm)	Bolt Diameter E (mm)
62 - 75	U376TR06	80	260	216	12
75 - 90	U376TR07	80	295	251	12
90 - 107	U376TR08	100	340	296	12
107 - 129	U376TR09	100	390	346	12
129 - 155	U376TR10	125	450	406	12
155 - 186	U376TR11	150	525	481	12

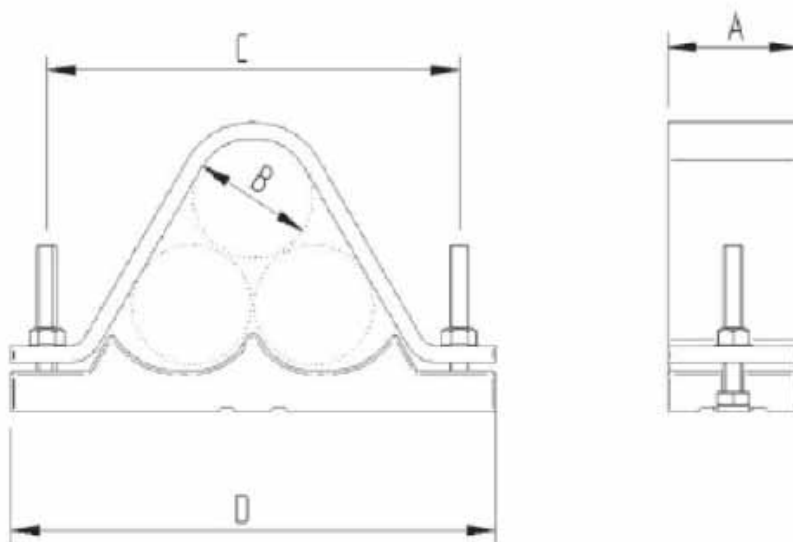

SPECIALIST DISTRI

