

Heavy wall heat shrink tube with adhesive, shrink ratio 3:1 - 4 : 1

For electrical insulation, sealing and mechanical reinforcement of cables and tubes up to 1kV.

- ❖ Suitable for cable joints and cable terminations
- ❖ Polyolefine crosslinked
- ❖ Fast recovery

- continuous temperature range from - 55°C till +90°C
- excellent resistance against UV, chemicals
- corrosion resistant
- dielectric strength: ≥ 15 kV/mm (ASTM D 2671-98)
- volume resistivity: $>1 \times 10^{12}$ ohm cm (ASTM D 257-98)
- heatshock (30 min. / 200 °C): no damage (ASTM D 2671-98)
- tensile strength: ≥ 12 Mpa (ASTM D 2671-98)
- elongation at break: $\geq 400\%$ (ASTM D 2671-98)
- longitudinal change: ≤ 15 (ASTM D 2671-98)
- water absorption: $\leq 0,5\%$ (ASTM D 570)
- flexible
- cadmium free, halogen free
- colour: black


Product cross references:

Raychem: WCSM/ XCSM

DSG Canusa: CFW

Art.nr.	D Ø D* mm	W* mm	Type
504600	9 - 3	2,2	9/3 -1200
504610	13 - 4	2,5	13/4 -1200
504620	19 - 6	2,5	19/6 -1200
504635	33 - 10	3,3	33/10 -1200
504640	40 - 12	4,3	40/12 -1200
504660	55 - 16	4,3	55/16 -1200
504670	65 - 21	4,3	65/21 -1200
504677	85 - 25	4,3	85/25 -1200
504680	100 - 30	4,3	100/30 -1200
504695	125 - 40	4,3	125/40 -1200
504710	160 - 50	4,3	160/50 -1200

* after free recovery

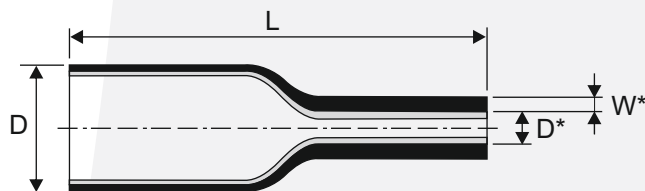

Subject to change without notice