


Insulated connection/ branch-off connector

various sizes

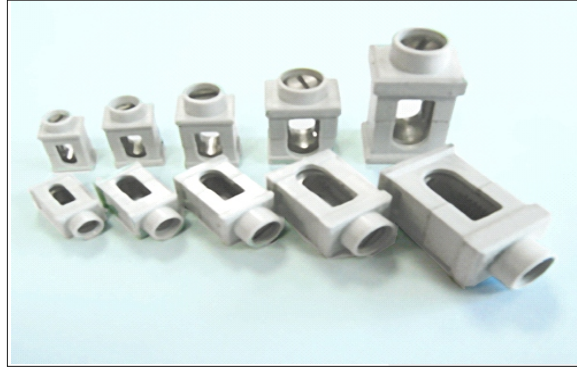

Application

Insulated connection/ branch-off connectors are used in cast resin joints as well as injection joints, and are suitable for copper as well as aluminium conductors. The insulated connection/ branch-off connectors consist of a tinned brass terminal and have a grey polycarbonate insulation housing, which is resistant against temperatures of -40 °C till 130 °C .

Features

- Very suitable for use in cast resin joints and injection joints
- Lasting pressure due to special buttress thread
- Space saving

Technical specifications

Insulated connection/ branch-off connector	Art. nr.	Diameter Max. mm ²	Max. current (A)
6 mm ²	400200	2 x 6	25
10 mm ²	400210	2 x 10	32
16 mm ²	400220	2 x 16	46
25 mm ²	400230	2 x 25	50
35 mm ²	400240	2 x 35	100

Subject to change without notice

Version June 2010

Cable joints and accessories • Sealing systems • Customer specific solutions

Insulated Connectors

Cable accessories